


**KUBOTA
BG ENGINES FOR
EMERGENCY STATIONARY
STANDBY GENSETS**



**KUBOTA STEPS UP
WHEN POWER GOES DOWN.**



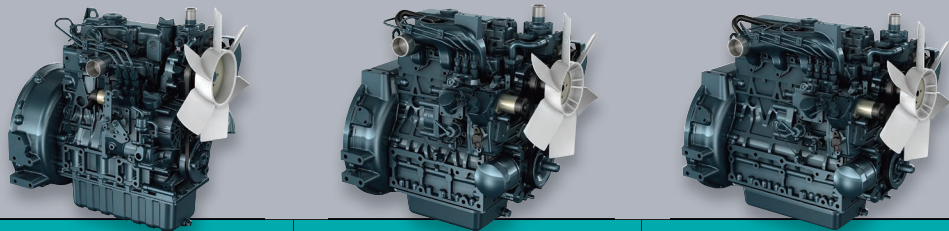

MODEL	D1305-E4BG	D1703-ME3BG	V2203-ME3BG
Standby Rating	10 kWe @ 1800 (.8 power factor)	15 kWe @ 1800 (.8 power factor)	19.4 kWe @ 1800 (.8 power factor)
Emission Level	Tier 4 Final	Tier 4I Emergency Stationary Standby	Tier 4I Emergency Stationary Standby
Flywheel	SAE 6.5	SAE 7.5	SAE 7.5
Flywheel Housing	SAE 5 (short)	SAE 4 (short)	SAE 4 (short)
Alternator	12V/30 Amp	12V/40 Amp	12V/40 Amp
Fan	6 Blade Pusher Fan	6 Blade Pusher Fan	6 Blade Pusher Fan
Number of Cylinders	3	3	4
Combustion System	IDI	IDI	IDI
Cycle	4 Stroke	4 Stroke	4 Stroke
Aspiration	Natural Aspiration	Natural Aspiration	Natural Aspiration
Displacement	1.261 L	1.647 L	2.197 L
Cooling System	Water Cooled	Water Cooled	Water Cooled
Total Lube Oil Capacity	5.67 L (1.5 US gal)	5.67 L (1.5 US gal)	7.56 L (2 US gal)
Fuel Consumption @ Standby	1 US gph @ 100% Load	1.28 US gph @ 100% Load	1.71 US gph @ 100% Load
Service Interval (Oil)	200 Hours	200 Hours	200 Hours
Dimensions (with Air Cleaner and Radiator):			
Length	27 in (688 mm)	32.2 in (817 mm)	36 in (914 mm)
Width	20 in (510 mm)	22.2 in (563 mm)	22.2 in (563 mm)
Height	28.3 in (720 mm)	30.3 in (769 mm)	30 in (760 mm)
Dry Weight	305 lbs	425 lbs	500 lbs

Product Support:

Warranty:

2 year/2000 hours







Over 700 service locations throughout North America


Loose Items:

Air Cleaner Kit
Radiator and Mounting Kit




Optional Items:

Muffler
Control Panel



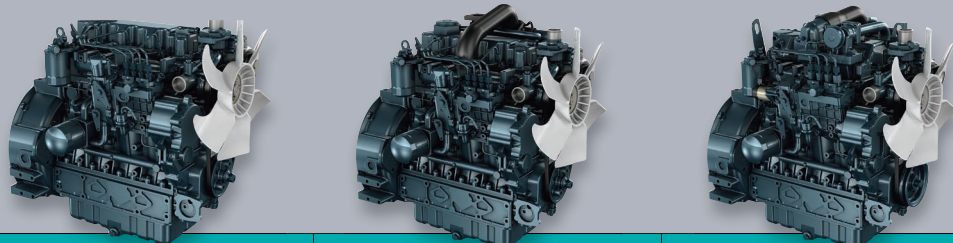

MODEL	V3300-E3BG	V3600-TE3BG	V3800-DITE3BG
Standby Rating	27 kWe @ 1800 (.8 power factor)	35 kWe @ 1800 (.8 power factor)	42.5 kWe @ 1800 (.8 power factor)
Emission Level	Tier 4I Emergency Stationary Standby	Tier 4I Emergency Stationary Standby	Tier 4I Emergency Stationary Standby
Flywheel	SAE 11.5	SAE 10/11.5	SAE 10/11.5
Flywheel Housing	SAE 3 (short)	SAE 3 (short)	SAE 3 (short)
Alternator	12V/45 Amp	12V/45 Amp	12V/45 Amp
Fan	6 Blade Pusher Fan	6 Blade Pusher Fan	6 Blade Pusher Fan
Number of Cylinders	4	4	4
Combustion System	IDI	IDI	DI
Cycle	4 Stroke	4 Stroke	4 Stroke
Aspiration	Natural Aspiration	Turbo	Turbo
Displacement	3.318 L	3.620 L	3.769 L
Cooling System	Water Cooled	Water Cooled	Water Cooled
Total Lube Oil Capacity	13.2 L (3.49 US gal)	13.2 L (3.49 US gal)	13.2 L (3.49 US gal)
Fuel Consumption @ Standby	2.46 US gph @ 100% Load	3.18 US gph @ 100% Load	3.65 US gph @ 100% Load
Service Interval (Oil)	250 Hours	250 Hours	500 Hours
Dimensions (with Air Cleaner and Radiator):			
Length	40.8 in (1037 mm)	35.5 in (901 mm)	35.5 in (901 mm)
Width	24 in (610 mm)	24.8 in (629 mm)	24.8 in (629 mm)
Height	37.4 in (949 mm)	39.6 in (1007 mm)	39.6 in (1007 mm)
Dry Weight	695 lbs	700 lbs	695 lbs

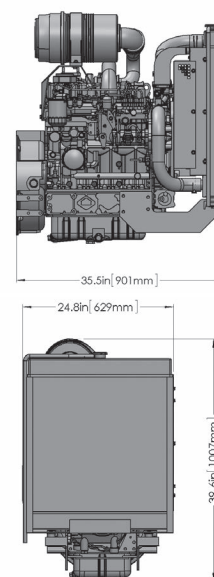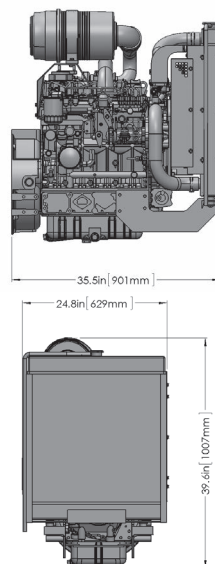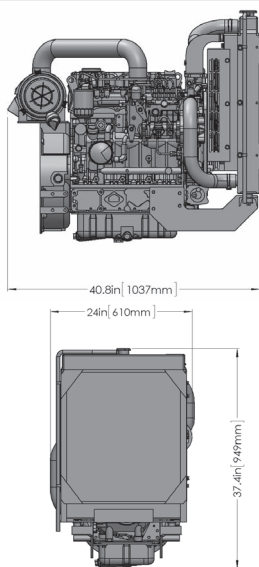

KUBOTA'S BG ENGINES FOR EMERGENCY STATIONARY STANDBY GENSETS.

When the unexpected occurs, your customers need a surefire answer to keep critical systems running. To keep lives in motion. You don't get a second chance to deliver when the need for energy is essential.

What powers your generator is what powers your success. That's why the NEW Kubota BG engine belongs in your product.

Kubota is the world's leading manufacturer of compact diesel engines, providing you with a single source for a multitude of power needs. No other engine manufacturer provides the multitude of global emission certifications and diverse fuel options that Kubota does. The Kubota BG engine delivers an easy-to-install package that's reliable, rugged and ready to go.

Low profile and high performance.

The Kubota BG engine provides high performance in a compact size. It's perfect for stationary standby generator requirements.

Durable and reliable belt-free design.

The Kubota BG engine includes a durable and dependable solid gear train. It does the job without the use of belts that can degrade or wear over time.

Consistent, predictable output every time.

A unique fly-ball governor system stabilizes and regulates energy output for safe, predictable performance.

More parts. More flexibility.

The Kubota BG engine includes the radiator and air cleaner. This gives you the flexibility to choose your own controls and exhaust configuration and allows for efficient, hassle-free setup and installation.

A clean, clear choice.

Kubota always provides leading efficiency and emissions performance.

